



# Execution \ Branch

## ■ Branch on Expression

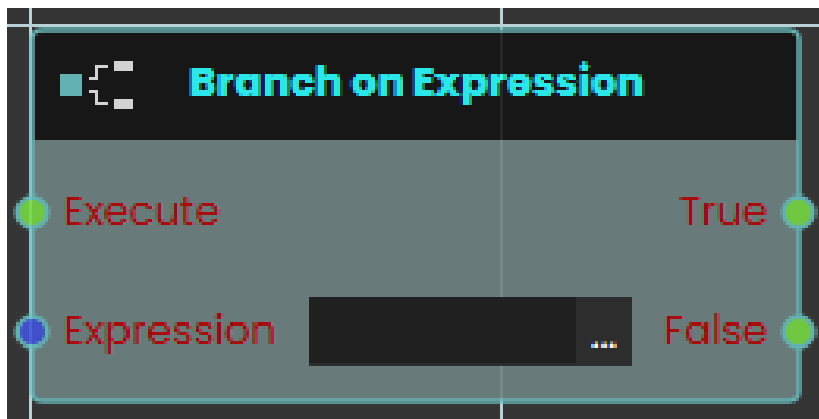

The **Branch on Expression** response enables the user to evaluate an expression with the possible outputs of True or False each time the event connected to it is triggered. Once the response is executed, the result of the evaluation can be acquired through the **True** or **False** ports.

## Example

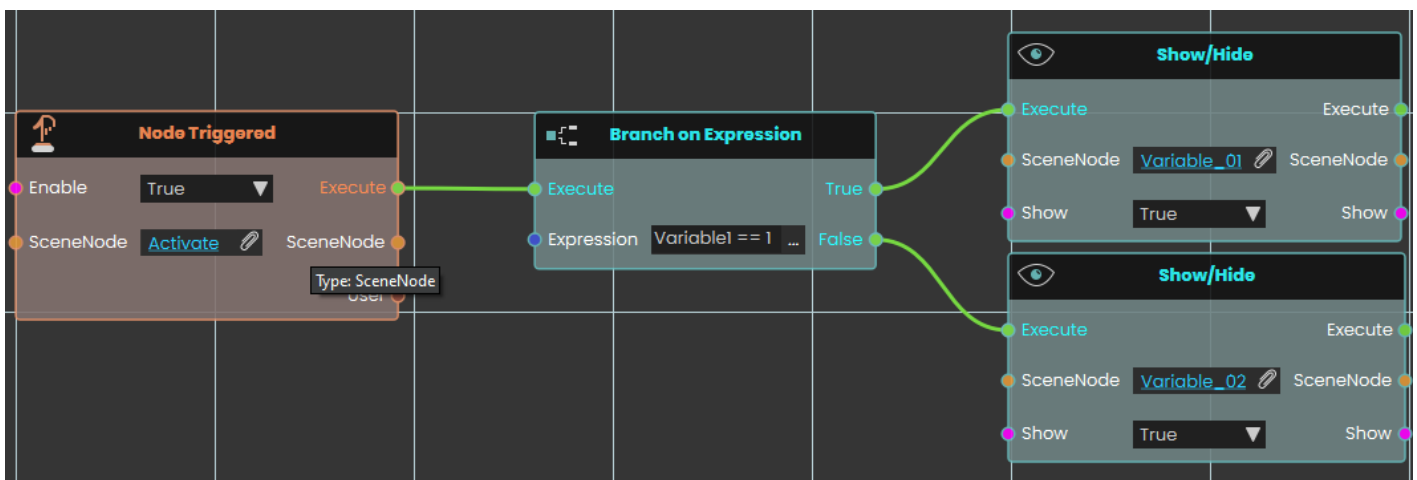

In this example, a **Branch on Expression** response is used to evaluate an expression once the user triggers the object named Activate. The result of the expression, which will be either True or False, if the result was true, the object named "Variable\_01" will be shown, if it was false, the object named "Variable\_02" will be shown.

---

---

Revision #9

Created 26 August 2024 12:15:55 by Hamzeh

Updated 17 March 2025 09:22:56 by Hamzeh